





Polypropylene spun cartridges

The filter cartridges are produced from pp foam and comply to all norms and hygienic standards. The structure of the cartridge ensures exceptional efficiency when it comes to stopping contaminants. The cartridges do not contain any chemical additives. They perfectly absorb sand, silt, rust and other suspensions from potable water. The PP fibers are resistant to chemical substances and prevent growth of microorganisms. The main area of application of the PP cartridges are cold water purification systems.


PP cartridges

Features

- certified by Polish Institute of Hygiene (PZH)
- competitive pricing
- 1 to 50 micron rating
- structure which ensures efficient filtration
- 100% polypropylene without any chemical additives
- high efficiency in low pressure installations
- usually applied as 1st stage of filtration
- resistant to chemicals
- prevents growth of microorganisms

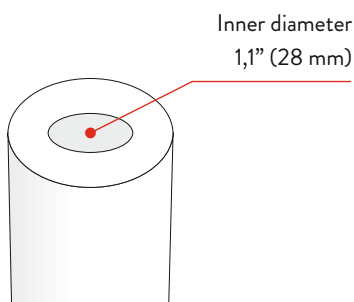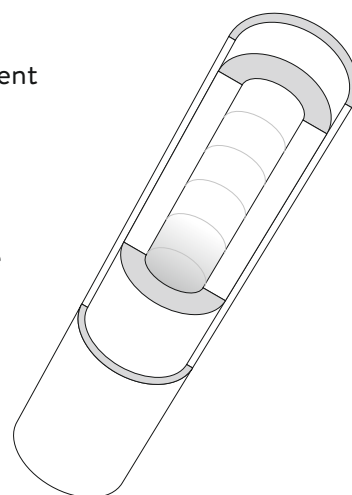

Certification

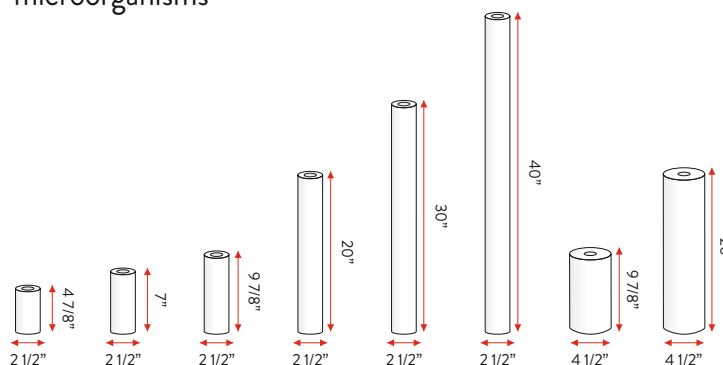

www.greenfilter.com.pl



Product complies
to EU norms.

The offer includes a wide variety of cartridges from 5" to 40". All types are compatible with most housings available on the market.



Technical data

Symbol	Height	Micron rating	Diameter	Max flow		Lifespan		
				lpm	gpm	liter	gallon	months
C5P1	4 7/8"	1µ	2 1/2"	10	2,65	8000	2115	3 - 6
C5P5	4 7/8"	5µ	2 1/2"	10	2,65	8000	2115	3 - 6
C5P10	4 7/8"	10µ	2 1/2"	10	2,65	8000	2115	3 - 6
C5P20	4 7/8"	20µ	2 1/2"	10	2,65	8000	2115	3 - 6
C5P50	4 7/8"	50µ	2 1/2"	10	2,65	8000	2115	3 - 6
C7P1	7"	1µ	2 1/2"	15	3,97	9000	2643	3 - 6
C7P5	7"	5µ	2 1/2"	15	3,97	9000	2643	3 - 6
C7P10	7"	10µ	2 1/2"	15	3,97	9000	2643	3 - 6
C7P20	7"	20µ	2 1/2"	15	3,97	9000	2643	3 - 6
C7P50	7"	50µ	2 1/2"	15	3,97	9000	2643	3 - 6
C10P1	9 7/8"	1µ	2 1/2"	20	5,29	10000	3170	3 - 6
C10P5	9 7/8"	5µ	2 1/2"	20	5,29	10000	3170	3 - 6
C10P10	9 7/8"	10µ	2 1/2"	20	5,29	10000	3170	3 - 6
C10P20	9 7/8"	20µ	2 1/2"	20	5,29	10000	3170	3 - 6
C10P50	9 7/8"	50µ	2 1/2"	20	5,29	10000	3170	3 - 6
C10P1B	9 7/8"	1µ	4 1/2"	40	10,5	18000	4760	3 - 6
C10P5B	9 7/8"	5µ	4 1/2"	40	10,5	18000	4760	3 - 6
C10P10B	9 7/8"	10µ	4 1/2"	40	10,5	18000	4760	3 - 6
C10P20B	9 7/8"	20µ	4 1/2"	40	10,5	18000	4760	3 - 6
C10P50B	9 7/8"	50µ	4 1/2"	40	10,5	18000	4760	3 - 6
C20P1	20"	1µ	2 1/2"	30	7,09	16000	4220	3 - 6
C20P5	20"	5µ	2 1/2"	30	7,09	16000	4220	3 - 6
C20P10	20"	10µ	2 1/2"	30	7,09	16000	4220	3 - 6
C20P20	20"	20µ	2 1/2"	30	7,09	16000	4220	3 - 6
C20P50	20"	50µ	2 1/2"	30	7,09	16000	4220	3 - 6
C20P1B	20"	1µ	4 1/2"	60	15,87	24000	6340	3 - 6
C20P5B	20"	5µ	4 1/2"	60	15,87	24000	6340	3 - 6
C20P10B	20"	10µ	4 1/2"	60	15,87	24000	6340	3 - 6
C20P20B	20"	20µ	4 1/2"	60	15,87	24000	6340	3 - 6
C20P50B	20"	50µ	4 1/2"	60	15,87	24000	6340	3 - 6
C30P1	30"	1µ	2 1/2"	60	15,87	36000	9150	3 - 6
C30P5	30"	5µ	2 1/2"	60	15,87	36000	9150	3 - 6
C30P10	30"	10µ	2 1/2"	60	15,87	36000	9150	3 - 6
C30P20	30"	20µ	2 1/2"	60	15,87	36000	9150	3 - 6
C30P50	30"	50µ	2 1/2"	60	15,87	36000	9150	3 - 6
C40P1	40"	1µ	2 1/2"	80	21,16	45000	11905	3 - 6
C40P5	40"	5µ	2 1/2"	80	21,16	45000	11905	3 - 6
C40P10	40"	10µ	2 1/2"	80	21,16	45000	11905	3 - 6
C40P20	40"	20µ	2 1/2"	80	21,16	45000	11905	3 - 6
C40P50	40"	50µ	2 1/2"	80	21,16	45000	11905	3 - 6

* Lifespan strictly dependant on inlet water quality.

** Values may vary by +/-5%